
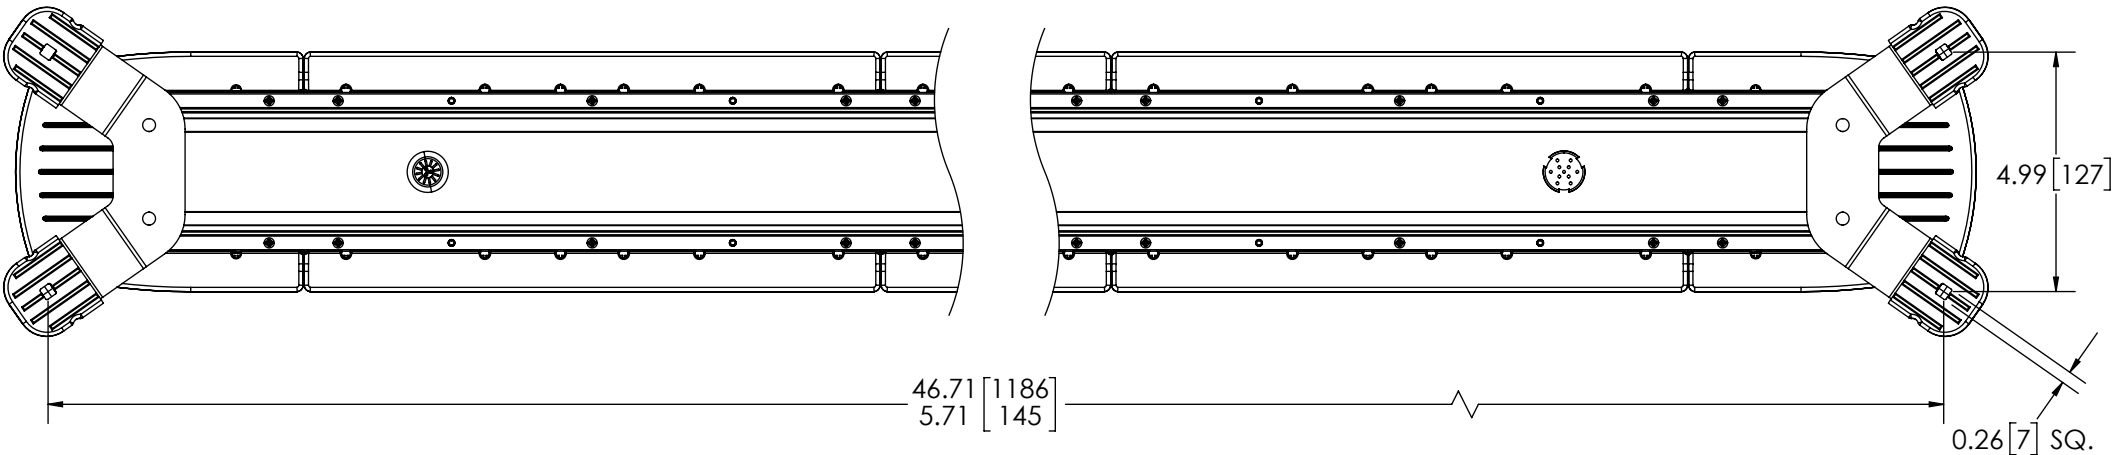
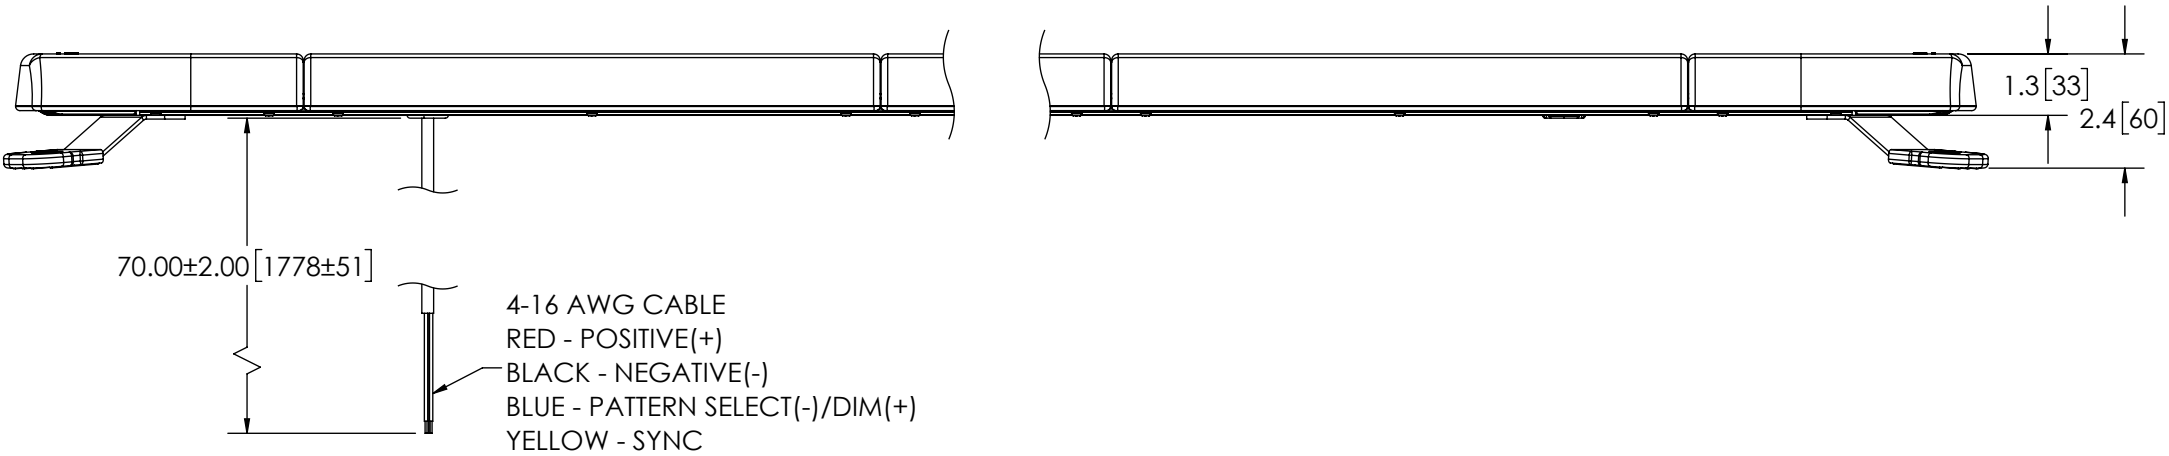


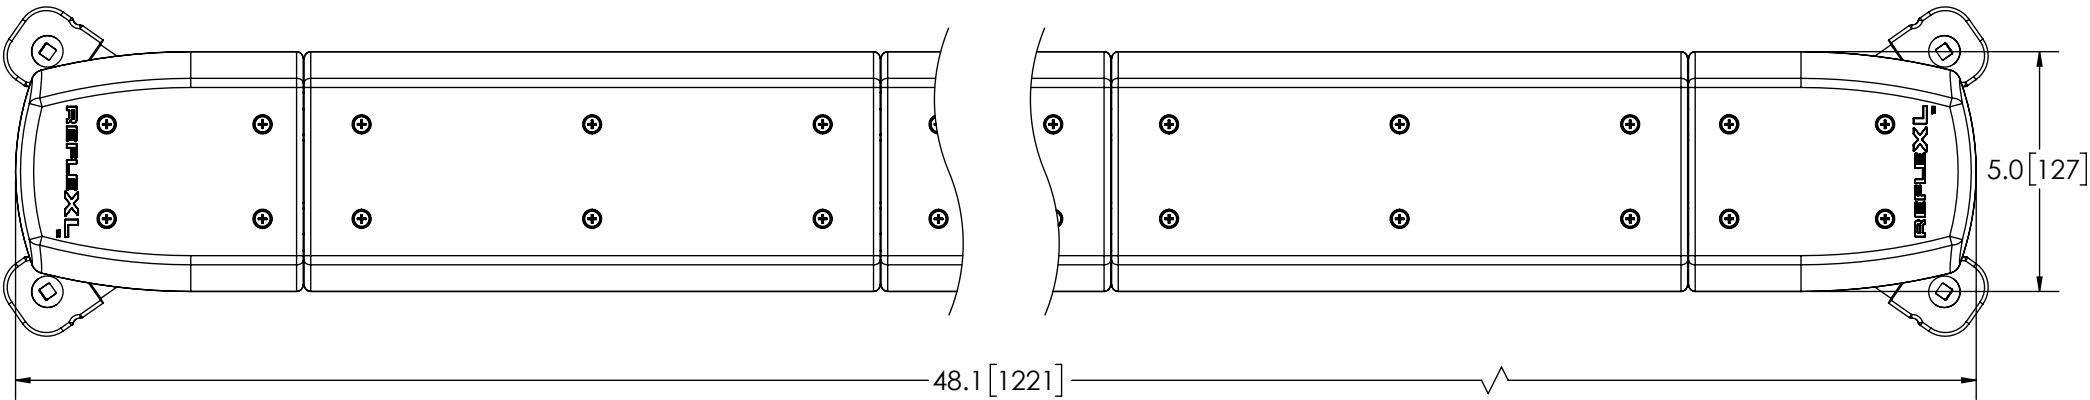

REVISION HISTORY		
REV.	DESCRIPTION	DATE
03	REVISED PER EP0135	2022-05-04
A	INITIAL RELEASE PER EP0135	2022-06-01
B	REVISED PER EP0135	2022-09-13

SPECIFICATIONS


- CERTIFICATIONS: **CE**; ECE R10; AMECA/SAE J845 (FEB 2019) CLASS 1A; YELLOW; CA Title 13 CLASS E; ; Reg 65 CertE6 TA1 000429; IP69K
Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
SINGLE : 120 ± 5 FLASHES PER MINUTE
DOUBLE : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9.0-32 VDC
- CURRENT (PEAK): 7.72A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 98.8W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 185°F (85°C)
- CONNECTION: 4 - 16 AWG CONDUCTOR CABLE
- MOUNTING: 4 BOLT THROUGH MOUNTING KIT
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 7.75 LBS (3.49 Kg)

COLOR CHART	
FGS. NO.	COLOR
11-048CA-E	AMBER

- NOTES:
- ROHS COMPLIANT
 - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2022 ELECTRONIC CONTROLS COMPANY

SCALE 1:4		APPROVALS		DATE		 ECCO® www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444 REFLEX XL,48",CLR LENS,DISCRETE WIRE,SINGLE COLOR CUSTOMER PART NO. SEE CHART SIZE: B DWG. NO. 11-048CX-E REV. B		
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.		DRAWN BY	BTK	2022-06-27				
		CHECKED	ABD	2022-06-28				
		MECH. ENG.	NMT	2022-06-30				
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:								
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm		INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02		ANGLES ± 0.5° FRACTIONS ± 1/64		ELEC. ENG.		
THIRD ANGLE PROJECTION 		TEST ENG.		SALES.				
		Electronically Controlled Use Latest Copy		SHEET 1 OF 1		Project: EP0135		Date Created: 2022-02-22