




## OZZ WR1

Discover OZZ WR1, a prominent reverse light with ECE R23 certification. This lamp is designed to enhance safety for you and your vehicle in all conditions. Designed to harmonize with OZZ's other lighting range, the OZZ WR1 has a modern aesthetic that complements your vehicle. With 2220 lumens and 1 lux at a range of 95 meters, it guarantees excellent rear visibility. Moreover, OZZ WR1 is equipped with adjustable mounts for easy installation, making it an optimal choice for all types of vehicles. The certifications for this product include ECER10, R148 (R23). It also comes with a 3-year functional warranty.

|                                   |                         |
|-----------------------------------|-------------------------|
| <b>Art. no.</b>                   | 88502                   |
| <b>Lamp type</b>                  | LED                     |
| <b>Diodes</b>                     | 4 pcs                   |
| <b>Voltage</b>                    | 10-32V DC               |
| <b>Actual effect 12V</b>          | 36 W                    |
| <b>Actual effect 24V</b>          | 36 W                    |
| <b>Nominal current at 12 V</b>    | 3 A                     |
| <b>Nominal current at 24 V</b>    | 1,5 A                   |
| <b>Theoretical lumen (Lm)</b>     | 3600                    |
| <b>Actual lumen</b>               | 2220                    |
| <b>1 lux @</b>                    | 95 m                    |
| <b>Kelvin (K)</b>                 | 5000                    |
| <b>IP-class</b>                   | IP68/69K                |
| <b>Beam pattern</b>               | Flood                   |
| <b>Position light</b>             | No                      |
| <b>Warning light</b>              | No                      |
| <b>Connection</b>                 | 2-pin DT                |
| <b>Cable lenght (mm)</b>          | 800                     |
| <b>Material chassi, lens</b>      | aluminum, polycarbonate |
| <b>Lenght, depth, height (mm)</b> | 164, 70/74, 45/60       |
| <b>Operating temperature</b>      | -40 - +60°C             |
| <b>E-mark approval</b>            | R148 (R23)              |
| <b>EMC</b>                        | ECE R10                 |
| <b>Weight (kg)</b>                | 0,5                     |
| <b>Warranty</b>                   | 3 years                 |

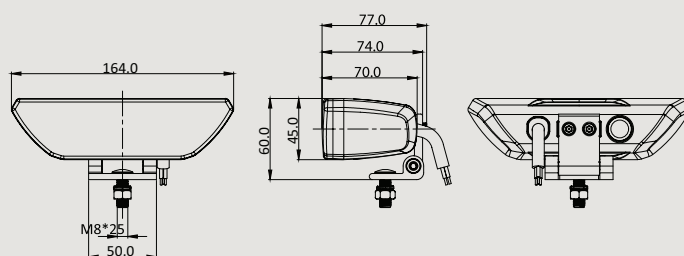

metres (m)

