

S07F3100.1
S07F4100.1
S07F6100.1



R65 LED LIGHT HEAD INSTRUCTION

RED

To +VDC (fuse @3A)

BLACK

To Chassis Ground

YELLOW


Pattern Selector

Connect the vacated YELLOW wire momentarily to RED for one second to change pattern

WHITE - YELLOW

Synchronization

Connect the yellow wire of the even number of heads to the white wire of the odd number of heads.

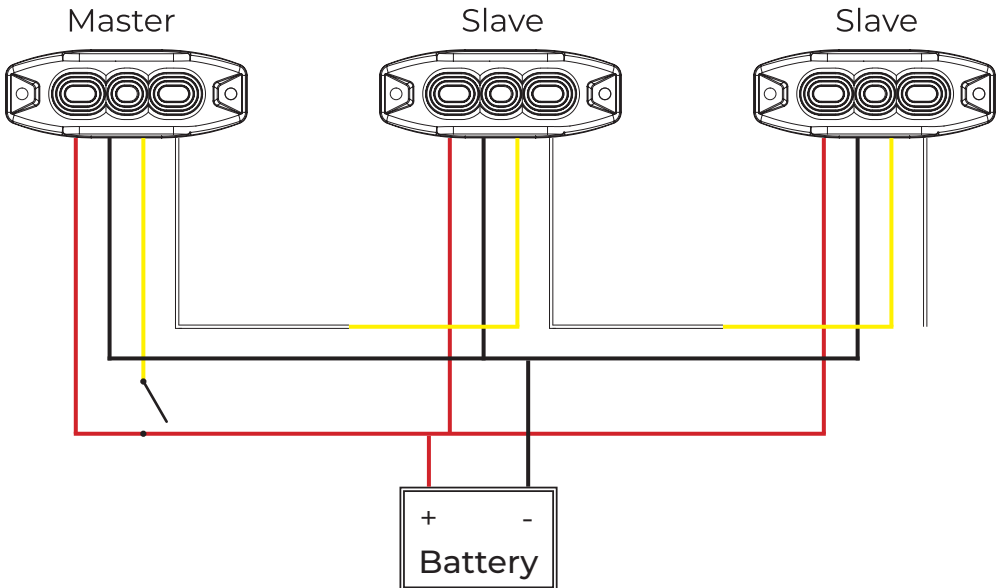

3 LED FLASH PATTERNS:

1 Single ECE R65 | 2 Double ECE R65 | 3 Quad ECE R65 | 4 Double SAE J595 CLASS1 | 5 Random
6 Single | 7 Double -1 | 8 Quad -1 | 9 Quint -1 | 10 Double -2 | 11 Burst -1 | 12 Quad -2 | 13 Burst -2
14 Quad -3 | 15 Quint -2 | 16 Burst -3 | 17 Double -3 | 18 Steady | 19 Off

4/6 LED FLASH PATTERNS

1 Single ECE R65 | 2 Double ECE R65 | 3 Quad ECE R65 | 4 Double SAE J595 CLASS1 | 5 Random
6 Single -Split | 7 Double -Split 1 | 8 Quad -Split 1 | 9 Quint -Split | 10 Double -Split 2 | 11 Burst -Split 1
12 Quad -Split 2 | 13 Burst -Split 2 | 14 Quad -All | 15 Quint -All | 16 Burst -All | 17 Half Steady-1 |
18 Half Steady-2 | 19 Off