


+ DC 12-24V

 - Mass Alternating group

- Pattern selection: Connect the red wire to ground for 1 second for the next pattern. Connect the red wire to ground for 3-5 seconds to reset the pattern.
- Synchronisation: Connect all white wires together. Synchronisation is now complete.
- Alternating: Divide the warning lights into two groups. Connect the green wires of group 1 to +Vdc. Leave the green wires of group 2 unused. The two groups will flash alternately.

Alternating wiring diagram

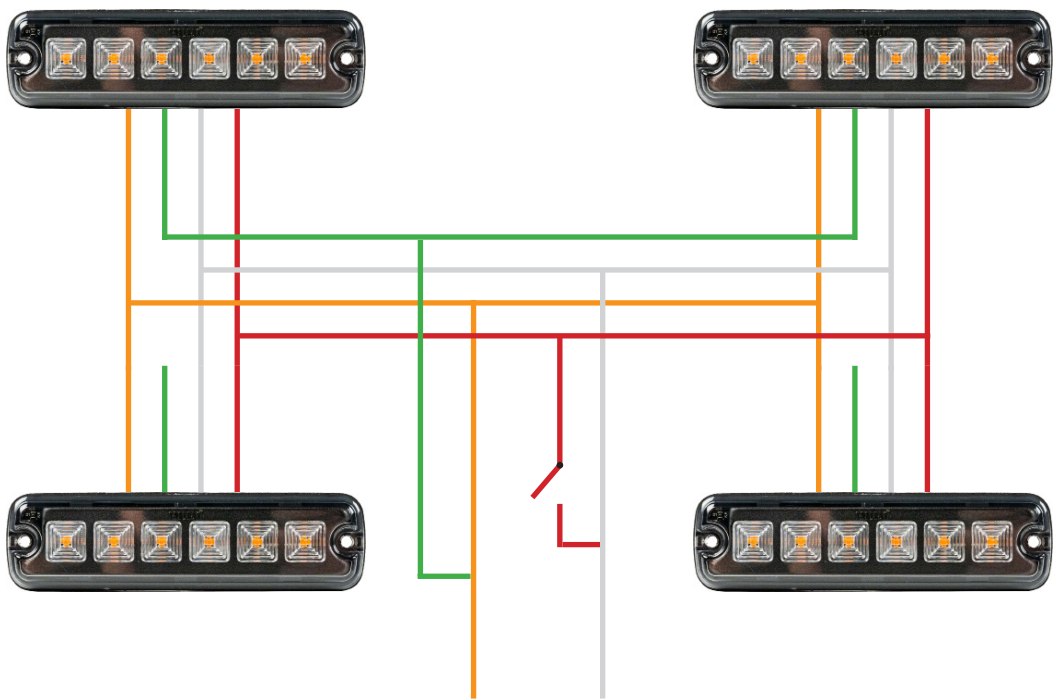

Wiring diagram for non-alternating

