Specifications

Article number	SF-1600A	Amber
	SF-1600W	White
	SF-1600R	Red
	SF-1600B	Blue
Voltage	10-30v	
wattage	18 watts	
IP value	IP69K	
Number of flash patterns	10	
Dimensions	113 x 30 x 9 mm	
Centre distance	102 mm	
Cable length	200 cm cable	
Housing material	Aluminium base	
Lens material	Polycarbonate lens cover	
Mounting	Screw mounting	
Connector	Without connector	
Functions	Synchronizing, alternating	
Mounting	Horizontal	
Temperature range	-40°C to +50°C	
Certificates	ECE-R10, ECE-R65 CL1, CISPR25 CL5, ADR	
Warranty	3 years	
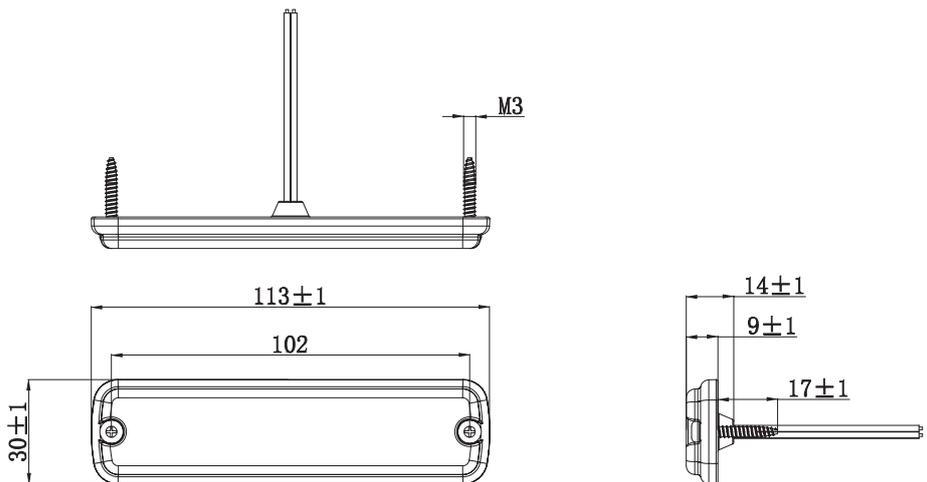
Cable colours	
⬜	Mass
🟧	+Vdc
🟩	Alternating function
🟥	Pattern selection & synchronisation