



# LED BEACON BARS

## Discover the selection.

Make yourself known with the LED beacon bars from TRALERT®. Available in various lengths, you can make all your vehicles highly visible all around. TRALERT® LED beacons meet the strictest quality standards and are equipped with all kinds of functions. For example, the TRALERT® Omnino Air-T has multiple patterns of flashing light, position light and search light. Discover the LED beacon selection on the following pages.





LED beacon bars Omnino Air-T Series

View the entire range at [www.tralert.com](http://www.tralert.com)



Optional with controller (Art. SL6-CTRL)

The most versatile LED beacon bar within the TRALERT® range: the Omnino Air-T Series. This LED beacon bar with aerodynamic slimline design features a wide range of functionalities. For example, the Omnino Air-T functions as a traffic advisor, searchlight/working light, brake light, rear light, flashing light and position light.

The Omnino Air-T Series consists of three models with 20, 22 or 24 modules. Except for the dimensions and modules, the specifications for the three models are the same. As standard, the IP69K waterproof Omnino Air-T is very fully certified including ECE-R65 TA2 certification, ECE-R10 certification and the required E and CE approvals.

Certificates & warranty:

IP68

R65  
TA2

CE

E

IP69K

R10

2Y

General product characteristics TRALERT® Omnino Air-T Series

Type:	LED beacon beam	Rear light modules:	Included (rear, brake & indicator light)
Voltage:	12~24V	Cruise mode:	Included
IP value:	IP69K	DIM function:	Included
Light colour:	Amber / white / red	Lens material:	Polycarbonate
Mounting:	Incl. mounting foot underneath	Housing material:	Cast aluminium (ADC12)
Number of flash patterns:	62	Housing colour:	Black
Traffic Advisor:	Included	Certificates:	ECE-R10 / ECE-R65 TA2
Searchlight / work light:	Included (front, rear, side)	Warranty:	2 years




TRALERT® Omnino Air-T 20 (Art. SL6-1208A)

Specifications

Dimensions:	1208.6 x 220 x 41.2mm
Height incl. base:	88.4mm
Base width:	255.2mm
Mainboard dimensions:	89.5 x 99.5 x 23.7mm
Number of modules:	20
Number of flash patterns:	62
Recommended control panel:	Art. SL6-CTRL

Dimensions SL6-1208A

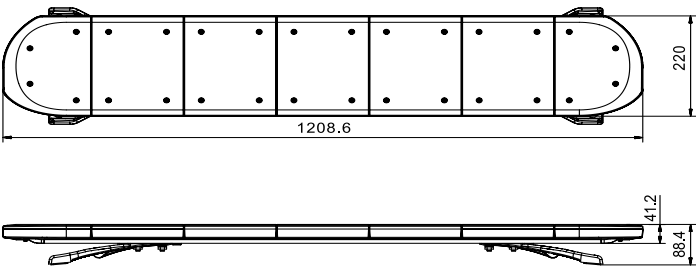


TRALERT® Omnino Air-T 22 (Art. SL6-1384A)

Specifications

Dimensions:	1383.6 x 220 x 41.2mm
Height incl. base:	88.4mm
Base width:	255.2mm
Mainboard dimensions:	89.5 x 99.5 x 23.7mm
Number of modules:	22
Number of flash patterns:	62
Recommended control panel:	Art. SL6-CTRL

Dimensions SL6-1384A

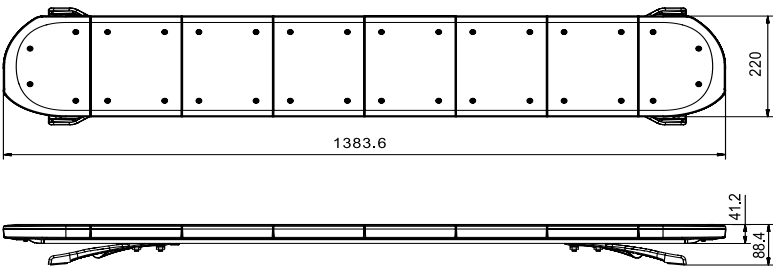


TRALERT® Omnino Air-T 24 (Art. SL6-1559A)


Specifications

Dimensions:	1558.6 x 220 x 41.2mm
Height incl. base:	88.4mm
Base width:	255.2mm
Mainboard dimensions:	89.5 x 99.5 x 23.7mm
Number of modules:	24
Number of flash patterns:	62
Recommended control panel:	Art. SL6-CTRL

Dimensions SL6-1559A

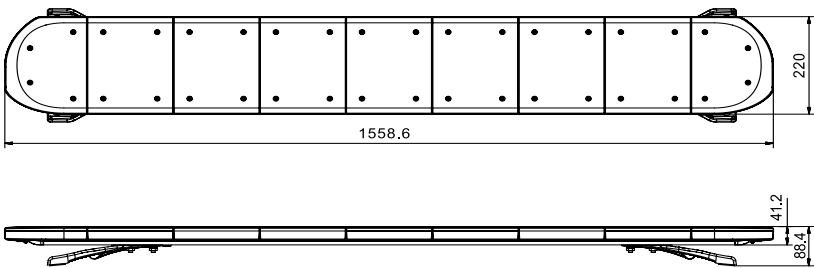

Connections mainboard:

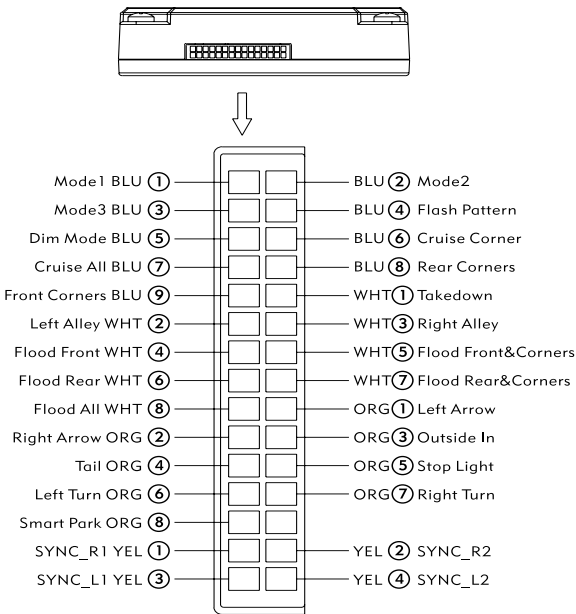



LED beacon bars CircuLux Series

View the entire range at [www.tralert.com](http://www.tralert.com)



Controller included

Meet the TRALERT® CircuLux Series: a highly versatile range of LED beacon bars with full illumination all round. This LED beacon bar has an aerodynamic slimline design and has a dark-look lens. As a result, the CircuLux Series gives you both a versatile and stylish beacon bar. The CircuLux Series includes the Traffic advisor function, a cruise mode and a DIM function, among others. A control panel is included as standard.

The CircuLux Series consists of five models with 18, 20, 22, 24 or 26 modules. Except for the dimensions and modules, the specifications for the five models are the same. As standard, the IP67 waterproof CircuLux Series is very fully certified including ECE-R65 TA2 certification, CISPR25 CL. 3 certification, ECE-R10 certification and the required E and CE approvals.

Certificates & warranty:

IP67

R65  
TA2

CE

E

CSPR  
25.C3

R10

2Y

General product characteristics TRALERT® CircuLux Series


Type:	LED beacon beam	Rear light modules:	Excluded
Voltage:	12-24V	Cruise mode:	Included
IP value:	IP67	DIM function:	Included
Light colour:	Amber	Lens material:	Polycarbonate (dark-look)
Mounting:	Incl. mounting foot underneath	Housing material:	Cast aluminium (ADC12)
Number of flash patterns:	18	Housing colour:	Black
Traffic Advisor:	Included	Certificates:	ECE-R10 / ECE-R65 TA2 / CISPR25 CL.3
Searchlight / worklight:	Excluded	Warranty:	2 years



TRALERT® CircuLux 18 (Art. SL5-1054A)

Specifications

Dimensions:	1054.1 x 203.2 x 25.5mm
Height incl. base:	65.5mm
Base width:	255.2mm
Number of modules:	18
Number of flash patterns:	18
Control panel dimensions:	120.5 x 73.5 x 18mm
Control panel connection:	Wireless, rechargeable with USB-C

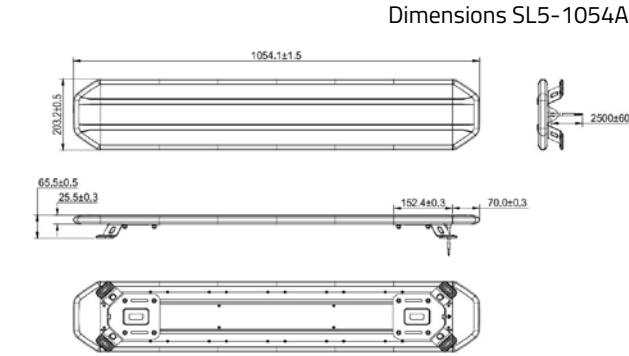


Dimensions SL5-1054A

TRALERT® CircuLux 20 (Art. SL5-1206A)

Specifications

Dimensions:	1206.5 x 203.2 x 25.5mm
Height incl. base:	65.5mm
Base width:	255.2mm
Number of modules:	20
Number of flash patterns:	18
Control panel dimensions:	120.5 x 73.5 x 18mm
Control panel connection:	Wireless, rechargeable with USB-C

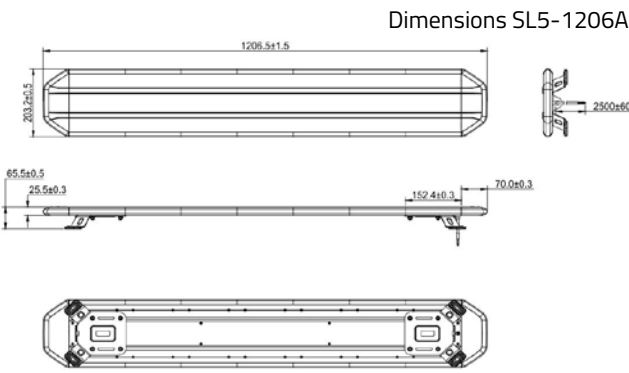


Dimensions SL5-1206A

TRALERT® CircuLux 22 (Art. SL5-1359A)

Specifications

Dimensions:	1359.0 x 203.2 x 25.5mm
Height incl. base:	65.5mm
Base width:	255.2mm
Number of modules:	22
Number of flash patterns:	18
Control panel dimensions:	120.5 x 73.5 x 18mm
Control panel connection:	Wireless, rechargeable with USB-C

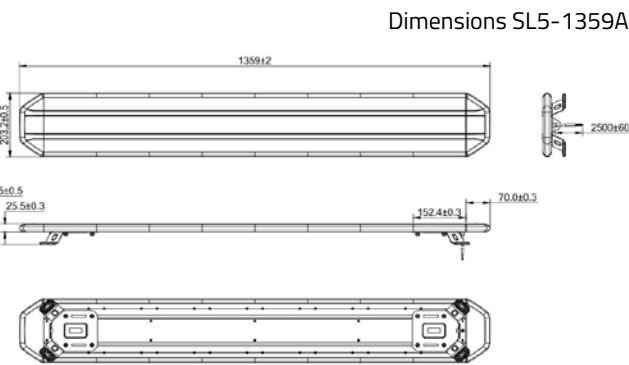


Dimensions SL5-1359A

TRALERT® CircuLux 24 (Art. SL5-1511A)

Specifications

Dimensions:	1511.3 x 203.2 x 25.5mm
Height incl. base:	65.5mm
Base width:	255.2mm
Number of modules:	24
Number of flash patterns:	18
Control panel dimensions:	120.5 x 73.5 x 18mm
Control panel connection:	Wireless, rechargeable with USB-C

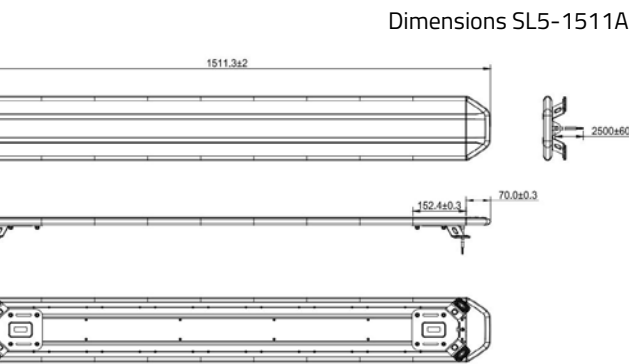


Dimensions SL5-1511A

TRALERT® CircuLux 26 (Art. SL5-1664A)

Specifications

Dimensions:	1664.1 x 203.2 x 25.5mm
Height incl. base:	65.5mm
Base width:	255.2mm
Number of modules:	26
Number of flash patterns:	18
Control panel dimensions:	120.5 x 73.5 x 18mm
Control panel connection:	Wireless, rechargeable with USB-C

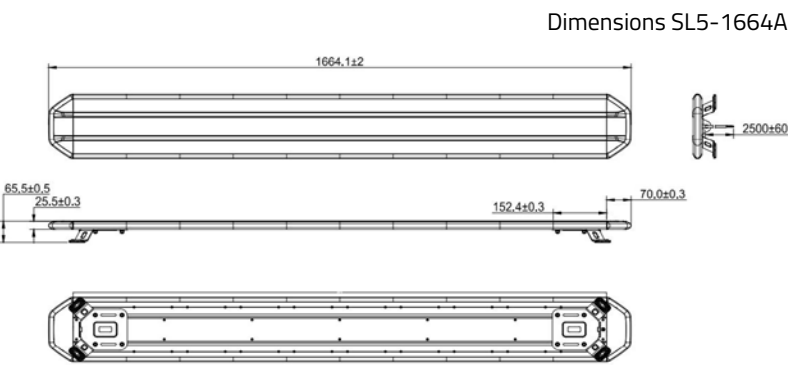

Dimensions SL5-1664A