


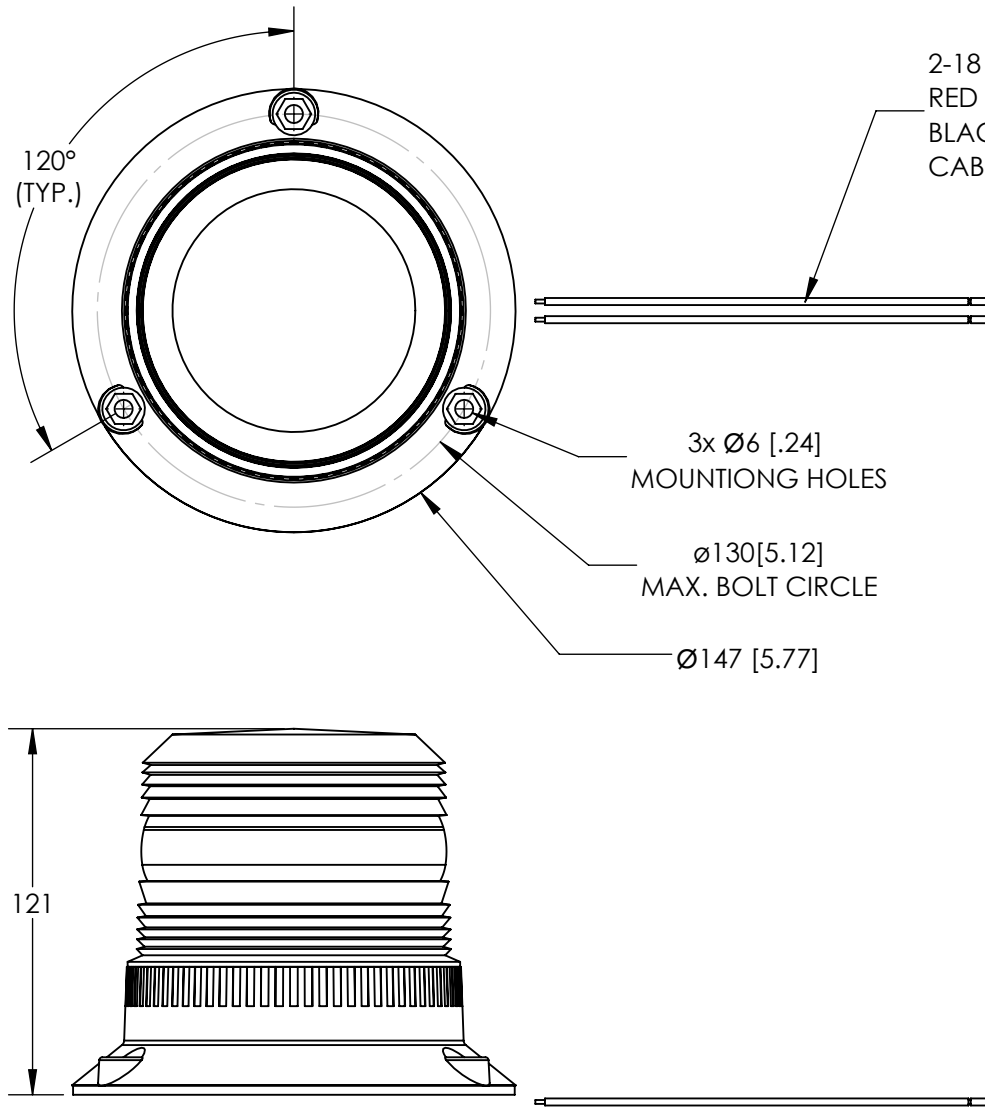

2-18 AWG WIRES
RED - POSITIVE (+)
BLACK - NEGATIVE (-)
CABLE LENGTH - APPROX 350mm

3x Ø6 [.24]
MOUNTING HOLES

Ø130[5.12]
MAX. BOLT CIRCLE

Ø147 [5.77]

121

SPECIFICATIONS

1. CERTIFICATIONS: ECE R10

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test protocols. Unless otherwise Specified, the product certifications referred to herein are predicated Upon the base product model configuration.

- FLASH MODE: 135 ± 15 FLASHES PER MINUTE (DOUBLE FLASH)
- VOLTAGE (NOMINAL): 12/24 VDC
- VOLTAGE (EXTREME): 10 to 36 VDC
- CURRENT (RMS): 1.06A (@ 12 VDC NOMINAL)
- CURRENT (PEAK): 1.85A (@ 12VDC NOMINAL)
- POWER (RMS MAXIMUM): 23W (@ 24 VDC NOMINAL)
- TEMPERATURE RANGE: -20°C (-4°F) TO 50°C (122°F)
- CONNECTION: 18 AWG WIRES
- MOUNTING: 3 BOLT MOUNTING
- BASE MATERIAL: ASA
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 1.32 LBS (0.6 Kg)

- NOTES:
- DIMENSIONS IN MILLIMETRES[INCHES (FOR REFERENCE)]
 - USE SUB ASSEMBLY (100-EB5010A) FOR MANUFACTURE

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2019 ELECTRONIC CONTROLS COMPANY

SCALE 1:2.5			APPROVALS		DATE	
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: B			DRAWN BY NP		2019-11-26	
			CHECKED CRT		2019-12-02	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG. KW		2019-12-09	
MILLIMETERS DECIMALS			ELEC. ENG. MMG		2019-11-28	
XX. ± 1.0mm XX.X ± 0.5mm			TEST ENG. JUP		2019-12-11	
INCHES DECIMALS			SALES.			
X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02						
THIRD ANGLE PROJECTION						
						
			Electronically Controlled Use Latest Copy		SHEET 1 OF 1	

		ECCO [®]		www.eccolink.com	
Americas (800) 635-5900		Europe +44 (0)113 237 5340		Asia Pacific +61 (0)3 63322444	
ECCOLED, BRONZE, 3BOLT, AMB, 12/24V					
CUSTOMER PART NO. EB5010A				PRODUCT SERIES: ECCOLED	
SIZE: A4		DWG. NO. EB5010A			REV. C
Project: LC1492		Date Created: 2018-02-05			