




OZZ XR3 P9" 65 Arctic Edition Driving light LED

The OZZ XR3 P9" 65 retains the powerful specifications of previous models XR2 P9" and XR3 P9" but also feature a powerful E-approved amber warning light, adding a layer of functionality for professional and safety-conscious drivers. The boost function of this driving light provides an intense 10,424 lumens, achieving 1 lux at up to 735 meters, making it ideal for long-range visibility on dark roads or challenging off-road adventures. It's also equipped with OZZ's signature dual dynamic position light in white and amber. With a color temperature of 5000 K, the XR3 P9" 65 emits a clear, powerful light that enhances visibility even in the darkest of

Art. no.	88108	Color LED	White, amber
Pcs LED	16	Connection	6-pin DT male + female
Voltage	10-35V DC	Cable lenght (mm)	1000 (800+200)
Theoretical effect	160W	Material bracket	Stainless steel
Actual effect	R112: 74W, boost: 130W (12V DC), R112: 73W, boost: 135W (24V DC)	Material housing	Aluminum
Nominal current	R112: 6,14A, boost: 11,17A (12V DC), R112: 3,04A, boost: 5,62A (24V DC)	Material lens	Polycarbonate
Functions	High beam, Boost mode, Dynamic position light, Warning light	Lenght (mm)	220
Theoretical lumen	15000	Depth (mm)	84,3
Actual lumen	R112: 7010, Boost: 10424	Height (mm)	210
1 lux @	R112: 480 m, Boost: 735 m	Height including bracket (mm)	227
Kelvin	5000K	Diameter (mm)	220
IP-class	IP68/IP69K	CC (mm)	-
Beam pattern	Driving	Operating temperature	-40°C - +60°C
Flash light pattern	Double flash	E-mark approval	ECE R148, R149, R65
Position light	Dynamic white and amber	Reference number	50
Color housing	White	EMC	ECE R10
RAL color	RAL9003	Pcs in master box	4
Color lens	Clear	EAN	7350166880170
		Warranty	3 years

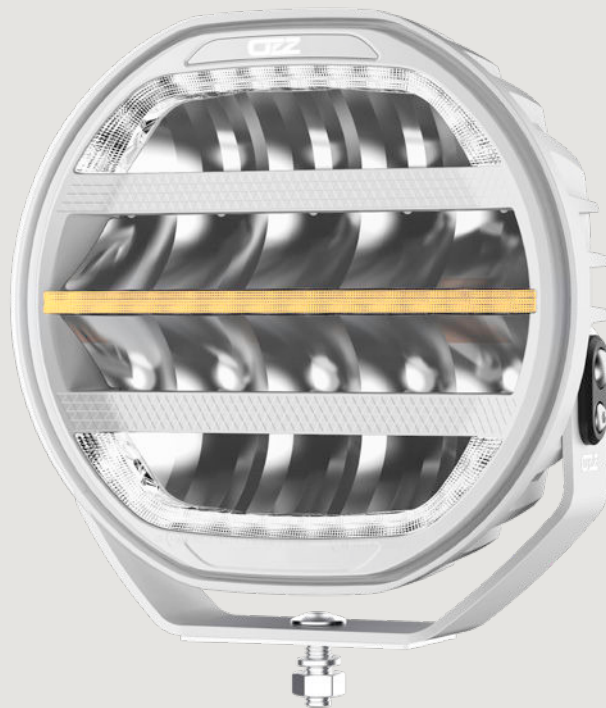